

# ACCESS CONTROL SYSTEM

## DTX-4300 Series

### Multi-Door Access System with Proximity Reader/Keypad and USB or Network

The DTX-4300 Series is a fully integrated PC managed multi-door access system with a proximity reader and keypad. The DTX-4300, when used on its own, provides standard access control functionality with the use of its two relays and two inputs for request to exit and door position, and enhanced system functionality when used with Hub Manager Professional software. The software allows the management of people and doors through easy to create reports and step by step wizard assisted expanded feature functionality. The software can communicate to the DTX-4300 either through a 485 connection, or on a LAN/WAN using the SEG-1 TCP/IP communication device. By utilizing the proximity reader and keypad together, a higher level of security is achieved by requiring both to grant access. The DTX-4300 can be directly mounted to a single gang electrical box or to most flat surfaces. The proximity reader is capable of being mounted up to a maximum of 10 feet away from the DTX-4300.



**Example shown:  
DTX-4302xUSB**


#### Features

- Integrated door control, proximity reader and keypad
- 2000 users
- 2000 event audit trail
- 32 doors per site (when managed with Hub Manager Professional)
- Bi-color LED to indicate operation
- Weather resistant design
- HID 26 - 40 bit format card compatibility
- Wiegand compatible
- HID Corporate 1000 compatible
- Fits over a single gang electrical box
- Communication via - SEG-1 (LAN/WAN) or USB to 485 converter
- Remote proximity reader mounting and glass mount option
- 3 year warranty
- UL 294 Listed

#### Technical Information

- Dimensions: 2.75" W x 5.25" H x 1.38" D
- Temperature tolerance: -31F to 150F
- Auxiliary Relay: Form C 1 amp SPDT
- Operating voltage: 12 VDC only
- Main relay: Form C 2 amp SPDT
- Request to Exit Input


## Riser Diagram

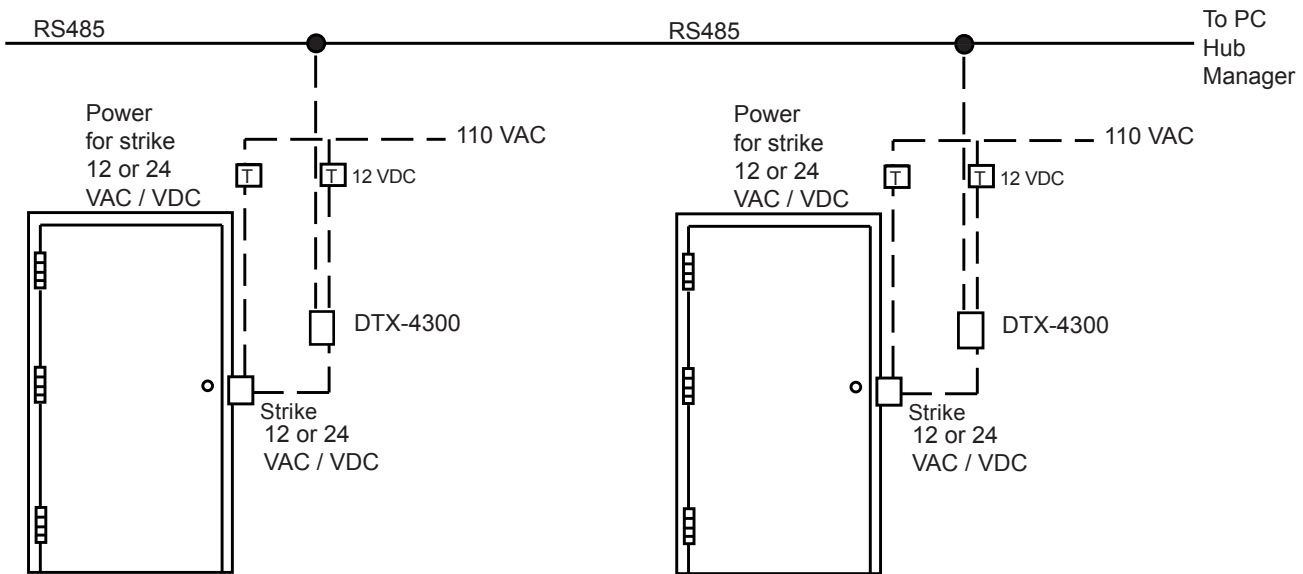

The Access Control System located at the door, acts as the reader and the controller.  
The wire connections are made at each door.

## Dimensions

### DTX-4300 Series

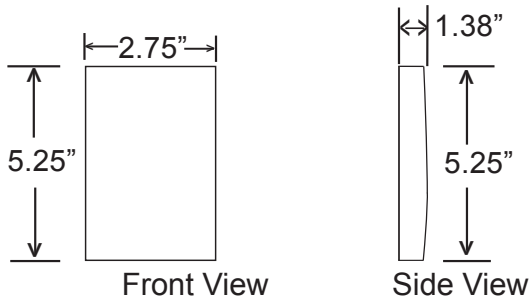

## Listings and Approvals



## Detex Limited Warranty


3 Year Limited Manufacturer's Warranty

## How to Order

### Interface Connection

N = Network

USB = USB Serial

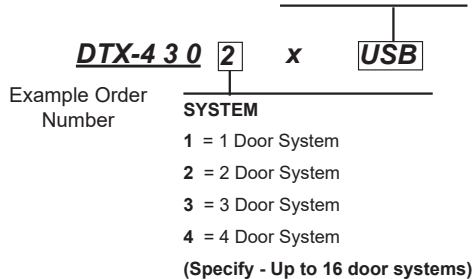

Where Trust is Built™  
**DETEx**®  
Life Safety and Security Door Hardware

Detex Corporation  
302 Detex Drive  
New Braunfels, Texas 78130-3045 USA  
PH. (830) 629-2900  
(800) 729-3839  
FAX (800) 653-3839  
<http://www.detex.com>  
USA Sales:  
[marketing@detex.com](mailto:marketing@detex.com)  
International Sales:  
[export@detex.com](mailto:export@detex.com)

⚠ Cancer & Reproductive Harm - [www.detex.com/prop65](http://www.detex.com/prop65)